

PALFINGER

P 130 A LOW SMART
RELIABILITY,
SAFETY AND
PERFORMANCE
ON ANY TERRAIN

LIFETIME EXCELLENCE



BAAS
VERHUURT.NL

KAN JE ER NIET BIJ?? HUUR MIJ!!


TECHNICAL SPECIFICATIONS

Maximum working height	13 m
Maximum cage floor	11 m
Maximum lateral outreach	6.3 m
Angle of main boom	-30° + 60°
Turntable rotation	360°
Basket capacity	250 kg
Basket dimensions	1.4 x 0.7 x 1.1 m
Height in transport conditions	2.37 m
Width in transport conditions	1.88 m
Length in transport conditions	5.62 m
GVW	3200 kg

OPTIONAL

Toolbox with rolling shutter
Fiberglass basket
Emergency electropump connected to the battery
Adjustable 60 W headlamp on the basket
Insulation 1000 V
Ladder to climb to the basket in stow position
Bordering
Paint upon request by the client, aerial part

WORKING DIAGRAMS

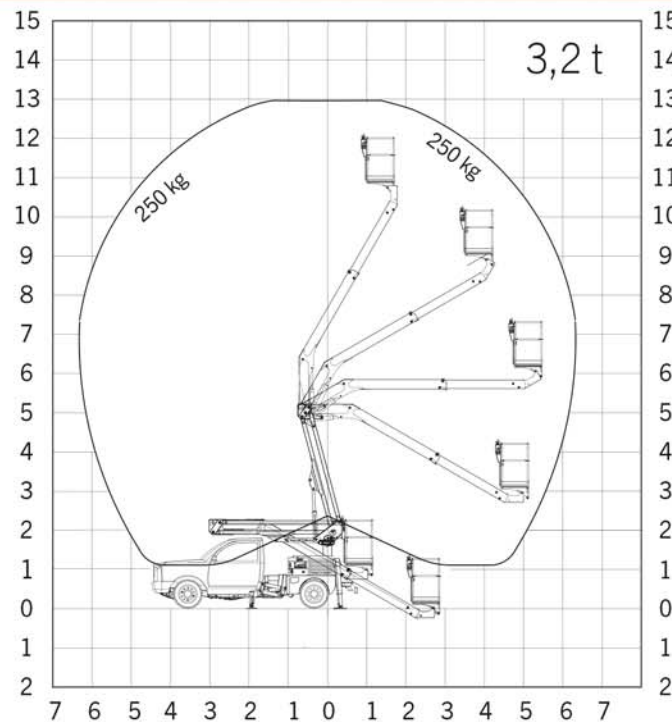

DIMENSIONS



Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.

KAN JE ER NIET BIJ?? HUUR MIJ!!



BAAS
VERHUURT.NL

072-2600565